

FT8

**Inkoppling på
auxilliary kontakt
(oftast DIN-kontakt)
på olika fabrikat
av transceivers**

Källa: CQ July 1998

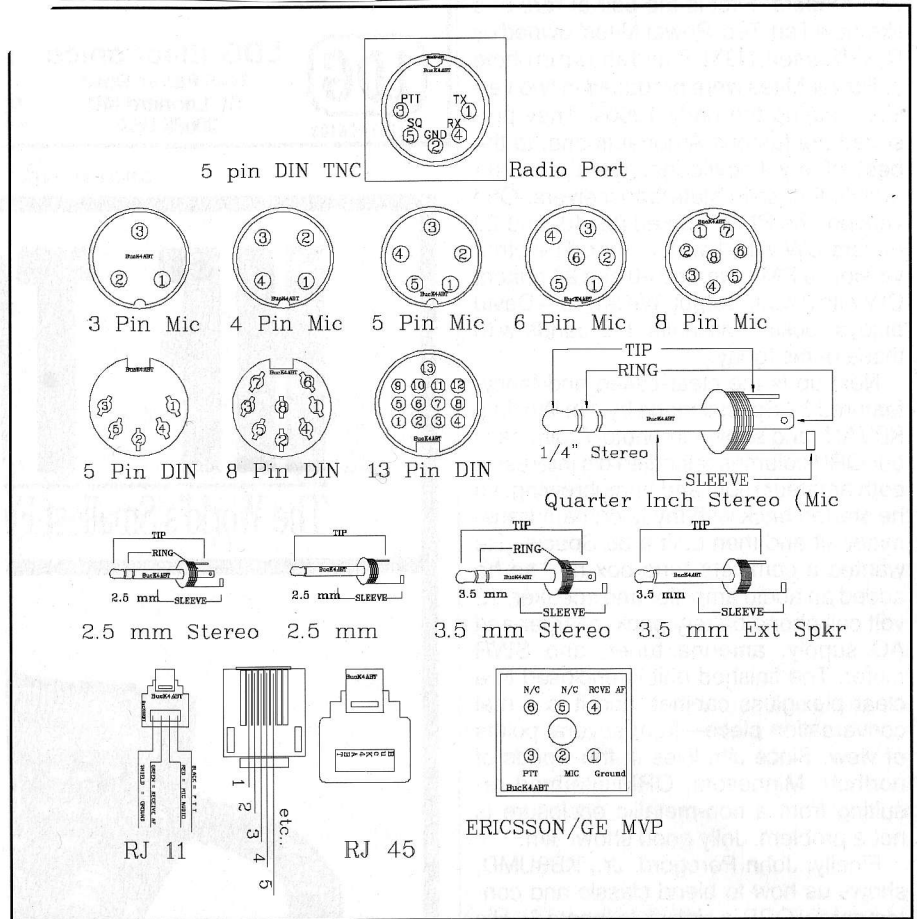


Fig. 1- Index of assorted transceiver and radio microphone connectors. (Caution: Some connectors will vary in pin number assignment.)

Transceiver Mfg.	Radio Connector Type	TX AFSK	Ground/Shield Pin 2	Push-To-Talk Pin 3	Receive AF Pin 4	Ext CD Pin 5
ADI	8 Pin	Pin 1	Pin 8	Pin 2	Ext Spkr	—
Alinco	8 Pin	Pin 1	Pin 8	Pin 2	Ext Spkr	—
Azden	6 Pin mini DIN	Pin 1	Pin 2	Pin 3	Pin 5	Ext CD Pin 6
Azden	8 Pin	Pin 1	Pin 2	Pin 7	Ext Spkr	—
Drake	4 Pin	Pin 1	Pin 3/4	Pin 2	Ext Spkr	—
ICOM	4 Pin	Pin 1	Pin 4	Pin 2	Ext Spkr	—
ICOM	8 Pin	Pin 1	Pin 6	Pin 5	Pin 8	—
ICOM	RJ-45	Pin 6	Pin 7	Pin 4	Pin 3	—
ICOM	8 Pin DIN (Acc)	Pin 4	Pin 2	Pin 3	Pin 5	Ext CD Pin 6
ICOM	13 Pin DIN (Acc)	Pin 11	Pin 2	Pin 3	Pin 12	Ext CD Pin 13
Kachina 505	DB25/ACC1	Pin 17	Pin 14	Pin 18	Pin 16	—
KDK	6 Pin	Pin 5	Pin 6	Pin 4	Ext Spkr	—
Kenwood	4 Pin	Pin 1	Pin 4	Pin 2	Ext Spkr	—
Kenwood	6 Pin	Pin 1	Pin 6	Pin 2	Ext Spkr	—
Kenwood	6 Pin mini DIN	Pin 1	Pin 2	Pin 3	Pin 5	Ext CD Pin 6
Kenwood	8 Pin	Pin 1	Pin 8/7	Pin 2	Ext Spkr	—
Kenwood	RJ-45	Pin 3	Pin 6	Pin 5	Pin 2	—
Kenwood	13 Pin DIN	Pin 11	Pin 4	Pin 9	Pin 3	—
Midland	4 Pin	Pin 1	Pin 2	Pin 4	Ext Spkr	—
Radio Shack	RJ-45	Pin 5	Pin 2	Pin 6	Ext Spkr	—
Regency HR-2	1/4" Stereo	Tip	Sleeve	Ring	Ext Spkr	—
Ten-Tec	1/4" Stereo	Ring	Sleeve	Tip	Ext Spkr	—
Ten-Tec	4 Pin	Pin 1	Pin 2	Pin 3	Ext Spkr	—
Uniden	5 Pin	Pin 1	Pin 2	Pin 3	Ext Spkr	—
Yaesu	5 Pin DIN	Pin 1	Pin 2	Pin 3	Pin 4	Ext CD Pin 5
Yaesu	6 Pin mini DIN	Pin 1	Pin 2	Pin 3	Pin 5	Ext CD Pin 6
Yaesu	8 Pin	Pin 8	Pin 7	Pin 6	Ext Spkr	—

Table 1- The pin numbers (1-5) in the topmost row of the table refer to the pin numbers of the popular five-pin DIN connector that is used on many of today's TNCs. This table lists many transceivers and their interface connections to the popular (TAPR TNC-2) five-pin DIN TNC radio port. See the radio microphone and assorted connector drawings at fig. 1.